



Dongguan Xiangyun Import and Export Co., Ltd (OEM、ODM)

Energy-saving, Smart, Comfortable



**Add: Room 101, No. 7, Lane 5, Taifa Road,
Xiegang Town, Dongguan City,
Guangdong Province, China**

Connect person: Li Hui

Tel: +8618820035458

Email: lihui430981@163.com

Site: <https://www.thermsmarthome.com/>

Product Guidelines



WIFI Thermostat

24V.....	3
230V.....	4



Wireless Thermostat

24V.....	4
230V.....	5



Wired Thermostat

24V.....	5
230V.....	6



Premier Thermostat

24V.....	6
230V.....	7



Production scenario.....	7
--------------------------	---



Product parameters.....	8–10
-------------------------	------



WIFI Thermostat



24V


Model: STN701W



Model: STN701W

- Universal-WIFI
- Works with Alexa
- Single Stage
- 1 Heat, 1 Cool
- Non-Programmable
- White/Blue/Green backlight
- Electric or Gas configurable
- Separate B & O terminals
- Separate heating and cooling swing (cycle rate) adjustments
- Room temperature calibration adjustment
- 5 minute compressor delay protection (selectable on or off)
- 24V power

Model: STN705W



Model: STN705W

- Universal-WIFI
- Works with Alexa
- Up to 1 Heat, 1 Cool Conventional
- 7 Day, 5/1/1 or Non-Programmable
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate B & O terminals
- Separate heating and cooling swing (cycle rate) adjustments

- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator (selectable on or off)
- Simple private label badge system
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- 24V power

Model: STN715W



Model: STN715W

- Universal-WIFI
- Works with Alexa
- Up to 2 Heat, 2 Cool Conventional
- 7 Day, 5/1/1 or Non-Programmable
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate B & O terminals
- Separate heating and cooling swing (cycle rate) adjustments

- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator (selectable on or off)
- Simple private label badge system
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- 24V power

Model: STN721W



Model: STN721W

- Universal-WIFI
- Works with Alexa
- Heat Pump
- Up to 2 Heat, 1 Cool Conventional
- Non-Programmable
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate B & O terminals
- Separate heating and cooling swing (cycle rate) adjustments

- Separate heating and cooling swing (cycle rate) adjustments
- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator (selectable on or off)
- Simple private label badge system
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- 24V power

Model: STN725W




Model: STN725W

- Universal-WIFI
- Works with Alexa
- Heat Pump
- Up to 2 Heat, 1 Cool Conventional
- 7 Day, 5/1/1 or Non-Programmable
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate B & O terminals
- Separate heating and cooling swing (cycle rate) adjustments

- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator (selectable on or off)
- Simple private label badge system
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- 24V power

Model: STN855W



Model: STN855W

- Universal-WIFI
- Works with Alexa
- Up to 2 Heat, 2 Cool Conventional
- Up to 3 Heat, 2 Cool Heat Pump
- Auto Changeover
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate heating and cooling swing (cycle rate) adjustments
- Keypad lockout

- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator (selectable on or off)
- Simple private label badge system
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- 24V power




WIFI Thermostat



230V


Model: E3RF-H



Model: E3RF-H

- Flexible
- Universal-WIFI
- 7 Day Programmable
- Beautiful Backlight
- Simple And Easy-to-operate Programming Buttons
- Integrated Pulley
- Floor Heating System Temperature Control
- AUTO/MANUAL Switch
- Universal back plate holes
- Exquisite design
- Use high-quality fireproof materials, imported chips and relays

Model: ST2402RFWIFI



Model: ST2402RFWIFI

- Universal-WIFI
- 7 Day, 5/2 Day and 24 hour Programmable
- Beautiful Backlight
- Heating /Cooling
- Simple And Easy-to-operate Programming Buttons
- Floor Heating System Temperature Control
- Low Battery Indicator
- Exquisite design
- 868Mhz for more stable communication

Model: ST2602RFWIFI



Model: ST2602RFWIFI

- Universal-WIFI
- Large, easy to read clear LCD display
- 7 Day, 5/2 Day and 24 hour Programmable
- Beautiful Backlight
- Heating /Cooling
- Room Temperature Calibration adjustment
- Switching sensitivity adjustable
- Manual override mode and Holiday mode
- Keypad Lockout
- Contemporary design
- Factory pre-set programme
- Easy installation




Wireless Thermostat



24V


Model: STN715RF

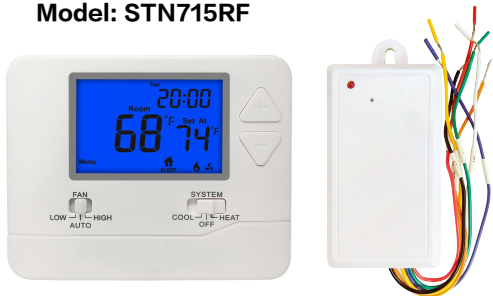

Model: STN715RF

- Affordable Comfort Control
- 2 Heat, 2 Cool
- Heating and Cooling Set point limits
- Separate heating and cooling swing (cycle rate) adjustments
- 7 Day, 5/1/1 or Non-Programmable
- White/Blue/Green backlight
- Universal sub-base
- Room temperature calibration adjustments
- Mounts on wall or junction box
- Battery or 24V power

Model: STN731RF

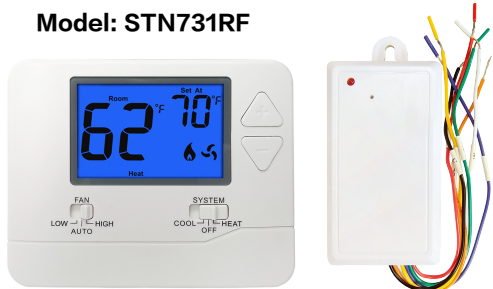

Model: STN731RF

- Affordable Comfort Control
- Universal 2H/1C Heat Pump or 1H/1C Conventional
- Heating and Cooling Set point limits
- Separate heating and cooling swing (cycle rate) adjustments
- Non-Programmable
- White/Blue/Green backlight
- Universal sub-base
- Room temperature calibration adjustments
- Mounts on wall or junction box
- Battery or 24V power



Wireless Thermostat



230V

Model: S2301RF



Model: S2301RF

- Large push button
- LED system indicator
- Heating/Cooling/Frost Protection
- Non-programmable
- Blue/Orange backlight
- Wall Mount or Base Mount
- Bat-low indicator
- Room Temperature Calibration adjustment
- 868.35Mhz with more stable communication

Model: S2302RF



Model: S2302RF

- Digital LCD
- Heating/Cooling
- 7 Day Programmable
- Blue/Orange backlight
- 6 time & 6 temp, per day
- AUTO/MANUAL Switching
- Battery low indicator
- Classical design
- Energy Saving

Model: ST2401RF



Model: ST2401RF

- Large LCD display screen
- Heating/Cooling
- Non-programmable
- Blue/Orange backlight
- Wall mounted
- Provides interactive interface when user sets up programs or operates
- Simple and easy to read installation menu
- Saving energy




Wired Thermostat




24V

Model: STN601




Model: STN701



- Singal stage
- 1Heat,1Cool
- Non-Programmable
- White/Blue/Green backlight
- Electric or Gas configurable
- Separate B&O terminals
- Separate heating and cooling swing(cycle rate)adjustments
- Room temperature calibration adjustment
- 5 minute compressor delay protection(selectable on or off)
- Battery or 24V power

Model: STN605




Model: STN705




- Singal stage
- 1Heat,1Cool
- 7 Day,5/1/1 or Non-Programmable
- White/Blue/Green backlight
- Easy menu driven programming
- Intuitive wake,leave,return,sleep programming icons
- Electric or Gas configurable
- Separate B&O terminals
- Separate heating and cooling swing(cycle rate)adjustments
- Room temperature calibration adjustment
- 5 minute compressor delay protection(selectable on or off)
- Battery or 24V power

Model: 3001




Model: 3201




- Single Stage
- 1 Heat,1 Cool
- Non-Programmable
- White/Blue/Green backlight
- Electric or Gas configurable
- Separate B & O terminals
- Separate heating and cooling swing(cycle rate) adjustments
- Room temperature calibration adjustment
- 5 minute compressor delay protection(selectable on or off)
- Battery or 24V power

Model: 3005



Model: 3205



- Single Stage
- 1 Heat,1 Cool
- 7 Day, 5/1/1 or Non-Programmable
- White/Blue/Green bacglight
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- Electric or Gas configurable
- Separate B & O terminals
- Separate heating and cooling swing(cycle rate) adjustments
- Room temperature calibration adjustment
- 5 minute compressor delay protection(selectable on or off)
- Battery or 24V power



Wired Thermostat



230V


Model: ST2303



Model: ST2303

- Digital LCD
- 7 Day, 5/2 Day and 24 hour Programmable
- 48 Time & 2 Temp per day
- Blue backlight
- HEAT/OFF/COOL mode switch
- Room Temperature Calibration adjustment
- Manual override mode
- Wall mounted
- Keypad lockout
- Easy installation and operation

Model: ST2305

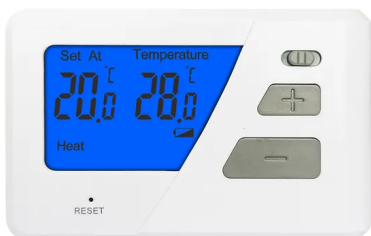

Model: ST2305

- LCD Display of Room temperature, Set temperature
- Non-programmable
- Blue backlight
- HEAT/OFF/COOL mode switch
- Simple manual operation to adjust the temperature setting
- Button battery backup to save settings during power failure
- Simple to install and designed to be used for almost all standard electric under floor heating system
- NTC sensor
- Bat-low indicator

Model: ST2402



Model: ST2402

- Large push button
- Heating/Cooling
- 7 Day Programmable
- White/Blue backlight
- 6 Time & 6 Temp.per day
- Simple Operation
- Easy installation
- Saving energy

Model: ST2602



Model: ST2602

- Large, easy to read clear LCD display
- 7 Day, 5/2 Day and 24 hour programmable
- 6 Time & 6 Temp.per day
- White/Blue/Green/Orange backlight
- Heat/OFF/Cool MODE switch
- Room Temperature Calibration adjustment
- Wall?mounted
- Manual override mode
- Keypad lockout



Premier Thermostat



24V

Model: STN805




Model: STN805

- 1 Heat/1 cool
- 7 Day, 5/1/1 or Non-Programmable
- Auto Changeover
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate heating and cooling swing (cycle rate) adjustments
- Keypad lockout

- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator (selectable on or off)
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- Battery or 24V power

Model: STN855



Model: STN855

- Universal
- Up to 2 Heat, 2 Cool Conventional
- Up to 3 Heat, 2 Cool Heat Pump
- 7 Day, 5/1/1 or Non-Programmable
- Auto Changeover
- Easy menu driven programming
- Intuitive wake, leave, return, sleep programming icons
- White/Blue/Green backlight
- Electric or Gas configurable
- Room temperature calibration adjustment
- Separate heating and cooling swing (cycle rate) adjustments

- Keypad lockout
- Heating and cooling setpoint limits
- 5 minute compressor delay protection (selectable on or off)
- Filter change indicator(selectable on or off)
- Easy wire color coded terminal blocks
- Universal sub-base
- Mounts on wall or junction box
- Battery or 24V power




Premier Thermostat



230V

Model: E3-H



Model: E3-H

- Large, easy to read clear LCD display
- Non-programmable
- Blue/White/Green/Orange Backlight
- HEAT (Heating)/OFF (Frost Protection)
- Large dial adjustable button
- Integrated Pulley
- Universal back plate holes, suitable for mounting holes in various countries
- Use high-quality fireproof materials, imported chips and relays
- Battery low indicator
- Classical design
- Simple Operation
- Easy installation
- Save Energy

Model: ST2402RF



Model: ST2402RF

- Large LCD display screen
- 7 Day, 5/2 Day and 24 hour programmable
- White/Blue backlight
- Heating/Cooling
- Room Temperature Calibration adjustment
- Switching sensitivity adjustable
- Manual override mode and Holiday mode
- Keypad Lockout
- Contemporary design
- Factory pre-set programme
- Energy-saving
- Eco-friendly

Model: ST2602RF



Model: ST2602RF

- Large, easy to read clear LCD display
- Heating/Cooling
- 7 Day, 5/2 Day and 24 hour programmable
- 6 Time & 6 Temp, per day
- White/Blue backlight
- Room Temperature Calibration adjustment
- Switching sensitivity adjustable
- Manual override mode and Holiday mode
- Factory pre-set programme
- Bat-low indicator



Model# 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable 5/2 Programmable From App	WIFI								
	STN701W	STN705W	STN715W	STN721W	STN725W	STN855W	E3RF-H	ST2402RFWIFI	ST2602RFWIFI
		7D	7D		7D	7D	7D	7D	7D
		5/1/1	5/1/1		5/1/1	5/1/1	5/2	5/2	5/2
	NP	NP	NP	NP	NP				
Power	24V	24V	24V	24V	24V	24V	230V	230V	230V
Stages of Heat	1	1	2	2	2	3*	2	2	2
Stages of Cool	1	1	2	1	1	2	1	2	2
Gas,Electric or Oil	•	•	•	•	•	•	•	•	•
Heat Pump with Auxiliary	N	N	N	Y	Y	Y	Y	Y	Y
Battery Power									
Dual Fuel Compatible				•	•	•	•	•	•
Display Size (Square Inches)	3	3	3	3	3	4.7	2	3.5	4.6
Auto Changerover						•	•	•	•
Filter Change Reminder		•	•	•	•	•	•	•	•
Room Temperature	•	•	•	•	•	•	•	•	•
Minimum Compressor Run		•	•	•	•	•	•	•	•
Comperssor Short Cycle Delay	•	•	•	•	•	•	•	•	•
Adjust Heat&Cool Temperature	•	•	•	•	•	•	•	•	•
Cool Fan Delay						•	•	•	•
High/Lowe Speed Fan Switch									
Always on Diasplay Light		•	•	•	•	•	•	•	•
Keypad Lockout						•		•	•
Memory Type(Permaent)	•	•	•	•	•	•	•	•	•
Touchscreen						•			
Warranty	5	5	5	5	5	5	1	1	1
Adjust Stepoint Limits	•	•	•	•	•	•	•	•	•
Millivolt									
Terminals	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	R, C, Y, W2, W/E, G, O, B	R, C, Y, W2, W/E, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B

Model# 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable 5/2 Programmable From App	Wireless									
	STN715RF	STN731RF	S2301RF	S2302RF	S2303RF	S2305RF	ST2401RF	ST2403RF	ST2601RF	ST2603RF
	7D			7D	7D					
	5/1/1			5/2	5/2					
		NP	NP			NP	NP	NP	NP	NP
Power	24V	24V	230V	230V	230V	230V	230V	230V	230V	230V
Stages of Heat	2*	2*	1	2	2	1	1	1	1	1
Stages of Cool	1	1	1	1	1	1	1	1	1	1
Gas,Electric or Oil	•	•	•	•	•	•	•	•	•	•
Heat Pump with Auxiliary	N	Y	N	Y	Y	N	N	N	N	N
Battery Power	•	•	•	•	•	•	•	•	•	•
Dual Fuel Compatible				•	•					
Display Size (Square Inches)	3	3	2.5	2.5	2.5	2.5	3.5	3.5	4.6	4.6
Auto Changerover										
Filter Change Reminder	•			•	•	•		•		•
Room Temperature	•	•	•	•	•	•	•	•	•	•
Minimum Compressor Run	•			•	•	•		•		•
Comperssor Short Cycle Delay	•	•	•	•	•	•	•	•	•	•
Adjust Heat&Cool Temperature	•	•	•	•	•	•	•	•	•	•
Cool Fan Delay										
High/Lowe Speed Fan Switch	•	•	•	•	•	•	•	•	•	•
Always on Diasplay Light										
Keypad Lockout					•					
Memory Type(Permaent)	•	•	•	•	•	•	•	•	•	•
Touchscreen										
Warranty	5	5	1	1	1	1	1	1	1	1
Adjust Stepoint Limits	•	•					•	•	•	•
Millivolt										
Terminals	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B	R, C, Y, W, G H, GL, O/B

Stages* = 2 Stages for conventional heat.

Model# 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable 5/2 Programmable From App	Builder/Wired										
	STN601	STN605	STN615	STN621	STN625	ST2401	ST2402	ST2403	ST2601	ST2602	ST2603
		7D	7D		7D		7D			7D	
		5/1/1	5/1/1		5/1/1		5/2			5/2	
	NP	NP	NP	NP	NP	NP		NP	NP		NP
Power	24V	24V	24V	24V	24V	230V	230V	230V	230V	230V	230V
Stages of Heat	1	1	2	2*	2*	1	2	1	1	2	1
Stages of Cool	1	1	2	1	1	1	2	1	1	2	1
Gas,Electric or Oil	•	•	•	•	•	•	•	•	•	•	•
Heat Pump with Auxiliary	N	N	N	Y	Y	N	Y	N	N	Y	N
Battery Power	•	•	•	•	•	•	•	•	•	•	•
Dual Fuel Compatible				•	•		•			•	
Display Size (Square Inches)	2.5	2.5	2.5	2.5	2.5	3.5	3.5	3.5	4.6	4.6	4.6
Auto Changerover							•			•	
Filter Change Reminder		•	•	•	•		•	•		•	•
Room Temperature	•	•	•	•	•	•	•	•	•	•	•
Minimum Compressor Run		•	•	•	•		•	•		•	•
Comperssor Short Cycle Delay	•	•	•	•	•	•	•	•	•	•	•
Adjust Heat&Cool Temperature	•	•	•	•	•	•	•	•	•	•	•
Cool Fan Delay							•			•	
High/Lowe Speed Fan Switch											
Always on Diasplay Light											
Keypad Lockout							•			•	
Memory Type(Permaent)	•	•	•	•	•	•	•	•	•	•	•
Touchscreen											
Warranty	2	2	5	2	2	1	1	1	1	1	1
Adjust Stepoint Limits											
Millivolt	•	•	•	•	•	•	•	•	•	•	•
Terminals	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	R, C, Y, W2, E, G, O, B	R, C, Y, W2, E, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B

Model# 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable 5/2 Programmable From App	Economy/Wired											
	STN701	STN705	STN715	STN721	STN725	STN731	ST23	ST27	ST2301	ST2302	ST2303	ST2305
		7D	7D		7D			7D		7D	7D	
		5/1/1	5/1/1		5/1/1			5/2		5/2	5/2	
	NP	NP	NP	NP	NP	NP	NP		NP			NP
Power	24V	24V	24V	24V	24V	24V	230V	230V	230V	230V	230V	230V
Stages of Heat	1	1	2	2	2	2*	1	2	1	2	2	1
Stages of Cool	1	1	2	1	1	1	1	1	1	1	1	1
Gas,Electric or Oil	•	•	•	•	•	•	•	•	•	•	•	•
Heat Pump with Auxiliary	N	N	N	Y	Y	Y	N	Y	N	Y	Y	N
Battery Power	•	•	•	•	•	•	•	•	•	•	•	•
Dual Fuel Compatible				•	•			•		•	•	
Display Size (Square Inches)	3	3	3	3	3	3	2.5	2.5	2.5	2.5	2.5	2.5
Auto Changerover												
Filter Change Reminder		•	•	•	•		•	•		•	•	•
Room Temperature	•	•	•	•	•	•	•	•	•	•	•	•
Minimum Compressor Run		•	•	•	•		•	•		•	•	•
Comperssor Short Cycle Delay	•	•	•	•	•	•	•	•	•	•	•	•
Adjust Heat&Cool Temperature	•	•	•	•	•	•	•	•	•	•	•	•
Cool Fan Delay												
High/Lowe Speed Fan Switch						•						
Always on Diasplay Light												
Keypad Lockout								•		•	•	
Memory Type(Permaent)	•	•	•	•	•	•	•	•	•	•	•	•
Touchscreen												
Warranty	5	5	5	5	5	2	1	1	1	1	1	1
Adjust Stepoint Limits						•						
Millivolt	•	•	•	•	•	•	•	•	•	•	•	•
Terminals	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	R, C, Y, W2, W/E, G, O, B	R, C, Y, W2, W/E, G, O, B	R, C, Y, W, G, H, GL, O, B	R, C, Y, W2, W/E, G, O, B	R, C, Y, W2, W/E, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	R, C, Y, W, G, H, GL, O, B

Stages* = 2 Stages for conventional heat.

Model# 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable 5/2 Programmable From App	Premier				
	STN805	STN855	E3-H	ST2402RF	ST2602RF
	7D	7D		7D	7D
	5/1/1	5/1/1		5/2	5/2
	NP	NP	NP		
Power	24V	24V	230V	230V	230V
Stages of Heat	1	3*	2	2	2
Stages of Cool	1	2	1	2	2
Gas,Electric or Oil	•	•	•	•	•
Heat Pump with Auxiliary	N	Y	Y	Y	Y
Battery Power	•	•	•	•	•
Dual Fual Compatible		•	•	•	•
Display Size (Square Inches)	4.7	4.7	2	3.5	4.6
Auto Changerover	•	•	•	•	•
Filter Change Reminder	•	•	•	•	•
Room Temperature	•	•	•	•	•
Minimum Compressor Run	•	•	•	•	•
Comperssor Short Cycle Delay	•	•	•	•	•
Adjust Heat&Cool Temperature	•	•	•	•	•
Cool Fan Delay		•	•	•	•
High/Lowe Speed Fan Switch				•	•
Always on Diasplay Light	•	•	•	•	•
Keypad Lockout	•	•	•	•	•
Memory Type(Permaent)	•	•	•	•	•
Touchscreen	•	•			
Warranty	5	5	1	1	1
Adjust Stepoint Limits	•	•	•	•	•
Millivolt	•	•	•		
Terminals	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B

Model# 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable 5/2 Programmable From App	Economy/Wired								
	3001/3201	3005/3205	3015/3215	3021/3221	3025/3225	S2301	S2302	S2303	S2305
		7D	7D		7D		7D	7D	
		5/1/1	5/1/1		5/1/1		5/2	5/2	
	NP	NP	NP	NP	NP	NP			NP
Power	24V	24V	24V	24V	24V	230V	230V	230V	230V
Stages of Heat	1	1	2	2	2	1	2	2	1
Stages of Cool	1	1	2	1	1	1	1	1	1
Gas,Electric or Oil	•	•	•	•	•	•	•	•	•
Heat Pump with Auxiliary	N	N	N	Y	Y	N	Y	Y	N
Battery Power	•	•	•	•	•	•	•	•	•
Dual Fual Compatible				•	•		•	•	
Display Size (Square Inches)	3.5	3.5	3.5	3.5	3.5	2.5	2.5	2.5	2.5
Auto Changerover									
Filter Change Reminder		•	•	•	•		•	•	•
Room Temperature	•	•	•	•	•	•	•	•	•
Minimum Compressor Run		•	•	•	•		•	•	•
Comperssor Short Cycle Delay	•	•	•	•	•	•	•	•	•
Adjust Heat&Cool Temperature	•	•	•	•	•	•	•	•	•
Cool Fan Delay									
High/Lowe Speed Fan Switch									
Always on Diasplay Light									
Keypad Lockout									
Memory Type(Permaent)	•	•	•	•	•	•	•	•	•
Touchscreen									
Warranty	5	5	5	5	5	1	1	1	1
Adjust Stepoint Limits									
Millivolt	•	•	•	•	•	•	•	•	•
Terminals	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	R, C, Y, W2, W/E, G, O, B	R, C, Y, W2, W/E, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, W, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	R, C, Y, W, G, H, GL, O, B

Stages* = 2 Stages for conventional heat.